


CONTROL24A

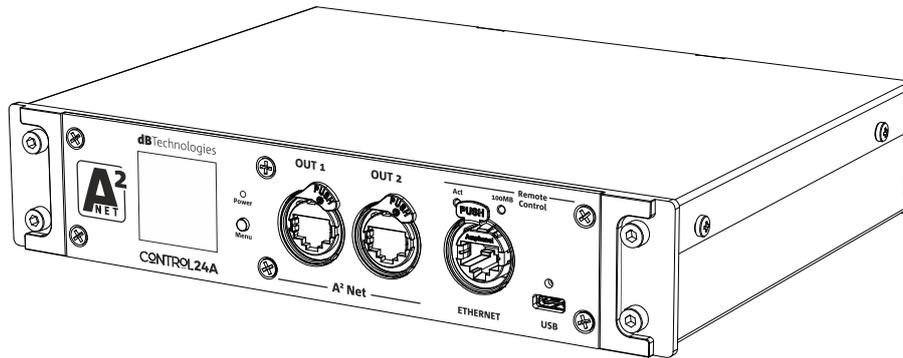

MAIN FEATURES

- 4 channels Audio In (4 Analog or 2 AES/EBU)
- 4 channels Audio Out (2 AES/EBU)
- 2 channels A2Net Out
- Compatible also with RDNet devices
- Compact half rack size
- Quick installation
- AURORA Net USB/Ethernet control


PACKAGE CONTENTS

The box contains:

- n.1 Control24A controller
- n.1 mains cable

This quick start and warranty documentation


DIMENSIONS

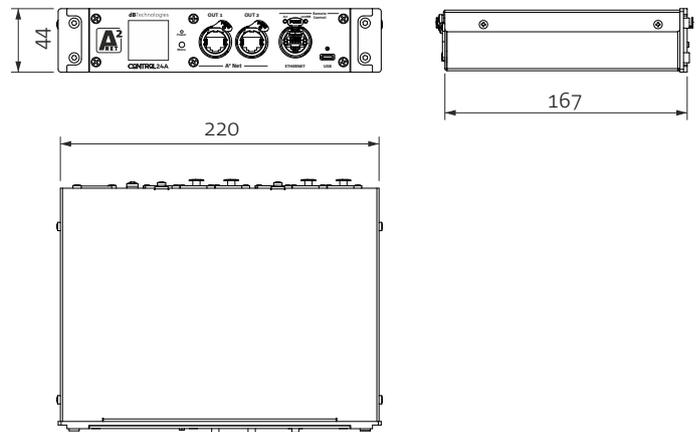

DESCRIPTION

Control24A is the new dBTechnologies professional controller for active speakers that feature A2Net or RDNet connections for a remote in-depth control and configuration using AURORA NET software. The A2Net output can route RDNet, Audio and power signal (up to 30W per single channel) over a single CAT5 cable. I/O connections include analog (XLR) and digital audio (AES/EBU). The mechanical design allows an easy, accurate and quick installation in half, 1U rack space thanks to the optional brackets.

ACCESSORIES

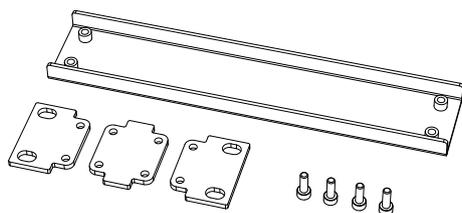

RMK-1
rack mount kit


SPECIFICATIONS

Type	Digital controller - half rack
Audio Inputs	4x XLR-F Analog (2x Analog/digital AES/EBU)
Audio Outputs	2x XLR-M Digital (AES/EBU)
A2Net ports	2x Output (Neutrik® etherCON, light ring Halo)
Data Control	Ethernet (RJ45) USB C-type
Cooling	Passive convection
Operating Range	100-240V~ (50-60Hz)
AD Converter	24 bit/48 kHz
Control	Menu button
Power Supply	Full-range SMPS
Dimensions (WxHxD)	220x44x167 mm (8.66x1.73x6,57 in)
Operation limit temp.	-20°C / 50°C (-4°F / 122°F)
Weight	1.91 Kg (4.21 lbs.)

I/O AND CONTROL PANEL

The controller includes a powerful DSP. The connections are both in the front and rear panels.

- 1- E-Paper Display
- 2- Power/Status LED
- 3- Menu button
- 4- A2Net Output
- 5- Status/Active LED Ethernet
- 6- Ethernet port
- 7- USB-C port
- 8- Analog/Digital audio Inputs
- 9- Analog audio Inputs
- 10- Digital audio Outputs
- 11- Mains Input

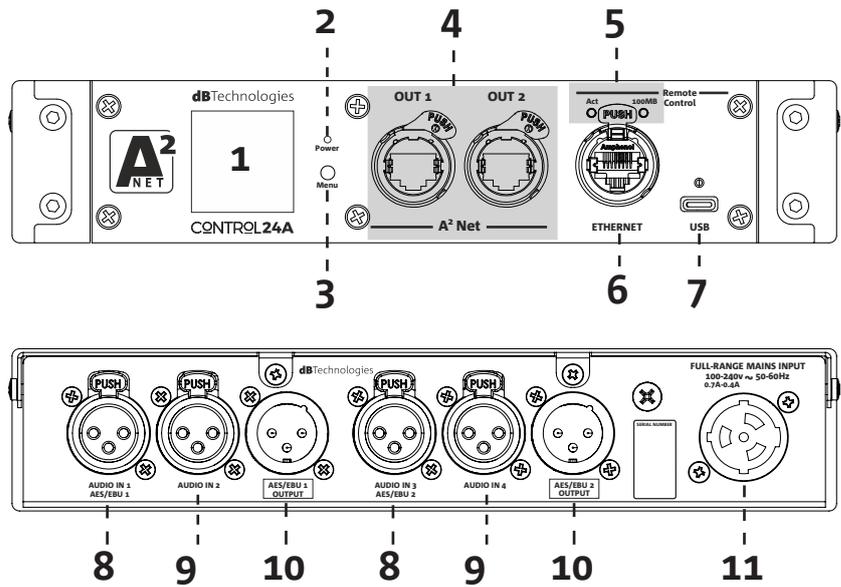


POWER SUPPLY SPECIFICATIONS (POWER ABSORPTION)

Draw at full power: 0.7 A (220-240V~) - 1.4 A (100-120V~)

Average power absorption: 6.2 W (220-240V~) - 6.5 W (100-120V~)

INSTALLATION


Control24A can be installed in different configurations. For a quick installation, on the front of the device (**A**) the user can find mechanical fixing point for rack mounting.

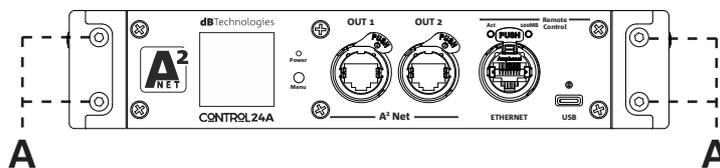

*N.1 CONTROLLER
IN A HALF RACK*



*N.1 CONTROLLER
IN ONE RACK*

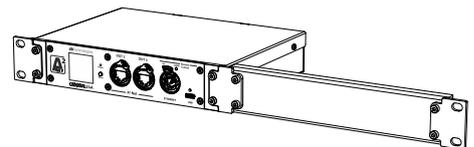


*N.2 CONTROLLERS
IN ONE RACK*




NETWORK SETUP

Connect your PC or Mac running AuroraNet to Control24A Ethernet or USB input. Connect the controller to A2Net or RDNet devices using at least CAT5e cables up to 200m. You can connect up to 32x A2Net/RDNet devices in daisy chain.

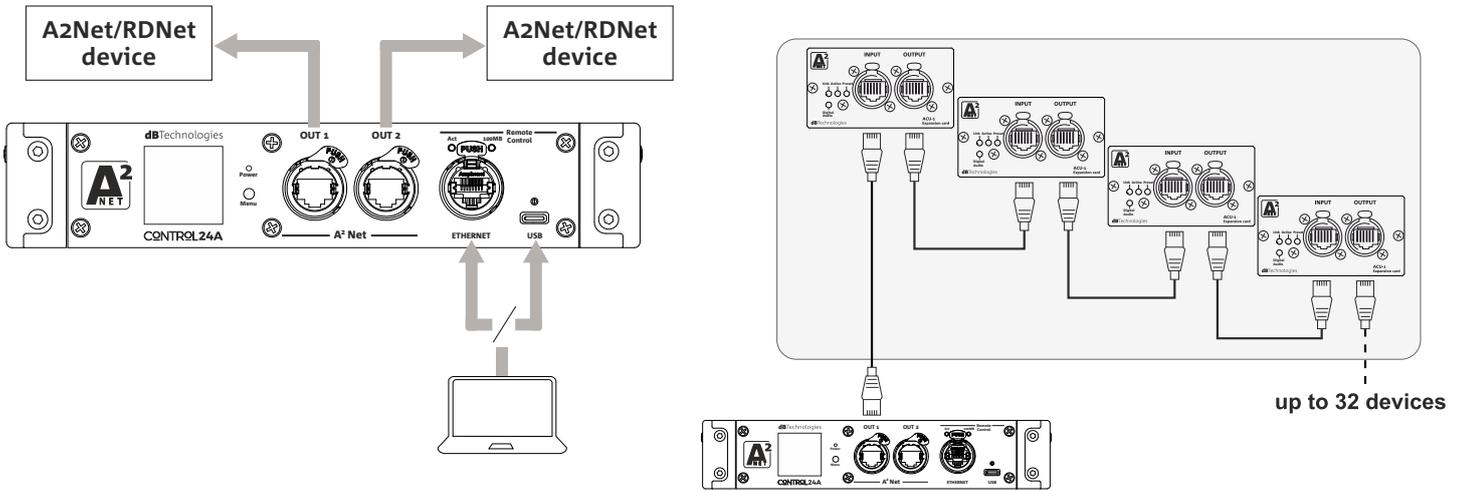

BASIC SYSTEM SETUP

Below an example of a network configuration.

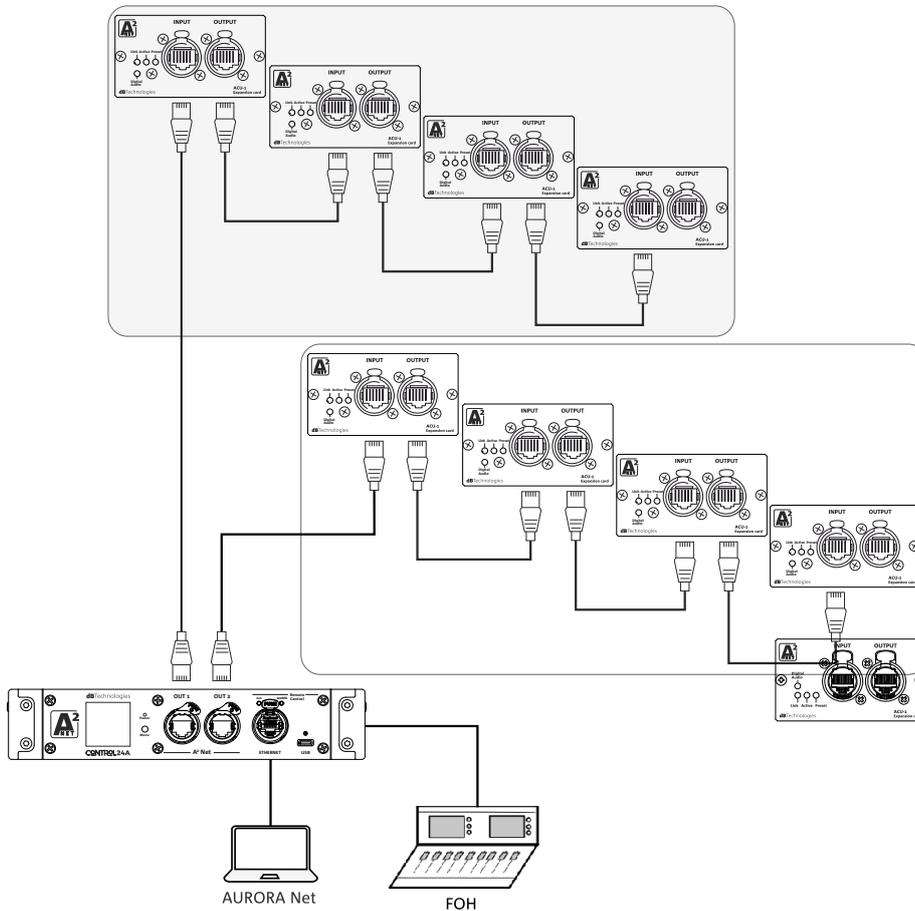

IMPORTANT NOTES AND WARNINGS

EMI CLASSIFICATION

According to the standards EN 55032 and 55035 this is a class B equipment, designed and suitable to operate in residential environments.

FCC CLASS B STATEMENT ACCORDING TO TITLE 47, PART 15, SUBPART B, §15.105

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

WARNINGS!



Make sure that the device is securely installed in a stable position to avoid any injuries or damages to persons or properties. Before installing the device check all the components for damages, deformations, missing or damaged parts that may compromise safety during installation. Follow the instructions contained in this quick start user manual and on the complete user manual to properly install the device. It's suggested to keep enough distance from other devices to allow the right cooling.


Features, specification and appearance of products are subject to change without notice. dBTechnologies reserves the right to make changes or improvements in design or manufacturing without assuming any obligation to change or improve products previously manufactured.

Only expert personnel may use the product and its accessories! Only use the accessories and configurations described in this manual, and proceed in accordance with the instructions given in the manuals for the accessories.

Only use the power cable provided.

The USB SERVICE DATA connection is to be used exclusively for the device control and for the firmware update; do not connect any other USB device to the unit to avoid the risk of damage and malfunction.

Check periodically the integrity and the functionality of the accessories and the technical equipments for a safe installation. user should never apply a load that exceeds the working load limits of any rigging components or equipment here presented. design, calculation, installation, testing and maintenance of suspension and stack systems for audio equipment must be performed only by qualified and authorized personnel. AEB Industriale s.r.l. denies any and all responsibility for improper installations, in the absence of safety requirements.

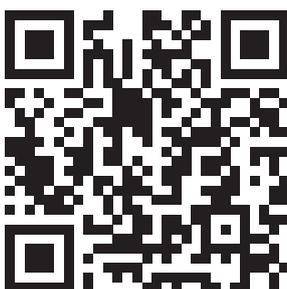

*Scan with your
QR Reader App
to download the
complete User
Manual.*

A.E.B. Industriale Srl
Via Brodolini, 8
Località Crespellano
40053 VALSAMOGGIA
BOLOGNA (ITALIA)
Tel. +39 051 969870
Fax +39 051 969725

www.dbtechnologies.com
info@dbtechnologies-aeb.com