

# **CROMO+** *Series*

*CROMO 8+*  
*CROMO 10+*  
*CROMO 12Club*  
*CROMO 12+*  
*CROMO 15+*

## ***2-Way Active Speakers***



**dB**Technologies

# 2-Way Active Speakers


The Cromo+ Series offers powered loudspeakers with modern digital technology for first time users, without having to miss out on professional features and outstanding audio performance.

The Cromo+ Series features the ultra compact digipack digital power amplifiers, based on the successful digipro® amp technology for maximum efficiency.

The integrated digital sound processor (DSP) caters for perfect sound calibration of the individual speaker components. All in all, true professional features, unique in its class and setting new standards in entry level speaker lines.

The compact multifunctional housing of the Cromo+ speaker line, with asymmetrical CD horns, can be used for many different applications, such as live events, a public address system for a singer, for monitoring purposes on stage, or for fixed installations in Bars or lounges.

All Cromo+ models have a microphone input on XLR and jack sockets for maximum flexibility.

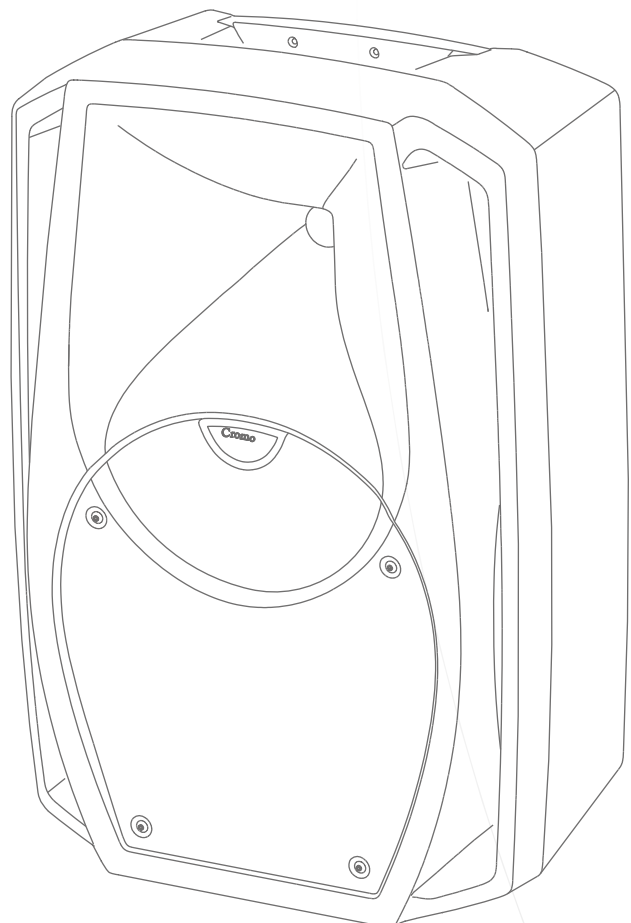

## CROMO 8+

### Technical Data

Speaker Type: 2-Way Active Speaker

### Acoustical data

Frequency Response [-10dB]: 68 - 20.000 Hz  
 Frequency Response [+/- 3dB]: 80 - 19.000 Hz  
 Max SPL: 118 dB  
 HF: 1 "  
 Type HF: Compression driver  
 Directivity: 90/70 x 60 °  
 Horn: Asymmetrical CD Horn  
 LF: 8 "

### Amplifier

Amp Technology: Digipack™  
 Amp Class: Class D  
 Power PRG: 300 Watt

### Processor

Controller: DSP 24bit/48kHz  
 System Presets: Flat, Processed  
 Limiter: Dual Active Peak, RMS, Thermal

### Mechanics

Housing: Polyporpylen PP  
 Angles Up: Monitor use 43 °  
 Width: 270 mm (10.8 in)  
 Height: 435 mm (17.4 in)  
 Depth: 252 mm (10.08 in)  
 Weight: 7,8 kg (15.43 lbs)

## CROMO 10+

### Technical Data

Speaker Type: 2-Way Active Speaker

### Acoustical data

Frequency Response [-10dB]: 65 - 20.000 Hz  
 Frequency Response [+/- 3dB]: 70 - 19.000 Hz  
 Max SPL: 121 dB  
 HF: 1 "  
 Type HF: Compression driver  
 Directivity: 90/70 x 60 °  
 Horn: Asymmetrical CD Horn  
 LF: 10 "

### Amplifier

Amp Technology: Digipack™  
 Amp Class: Class D  
 Power PRG: 400 Watt

### Processor

Controller: DSP 24bit/48kHz  
 System Presets: Flat, Processed  
 Limiter: Dual Active Peak, RMS, Thermal

### Mechanics

Housing: Polyporpylen PP  
 Angles Up: Monitor use 43 °  
 Width: 320 mm (12.8 in)  
 Height: 508 mm (20.32 in)  
 Depth: 297 mm (11.88 in)  
 Weight: 12 kg (26.46 lbs)

## CROMO 12Club

### Technical Data

Speaker Type: 2-Way Active Speaker

### Acoustical data

Frequency Response [-10dB]: 55 - 20.000 Hz  
 Frequency Response [+/- 3dB]: 60 - 19.000 Hz  
 Max SPL: 124 dB  
 HF: 1 "  
 Type HF: Compression driver  
 Directivity: 90/70 x 60 °  
 Horn: Asymmetrical CD Horn  
 LF: 12 "

### Amplifier

Amp Technology: Digipack™  
 Amp Class: Class D  
 Power PRG: 400 Watt

### Processor

Controller: DSP 24bit/48kHz  
 System Presets: Flat, Processed  
 Limiter: Dual Active Peak, RMS, Thermal

### Mechanics

Housing: Polyporpylen PP  
 Angles Up: Monitor use 43 °  
 Width: 402 mm (16.08 in)  
 Height: 615 mm (24.6 in)  
 Depth: 356 mm (14.24 in)  
 Weight: 17,7 kg (39.02 lbs)



**CR 8+**



**CR 10+**



**CR 12**  
club

## CROMO 12+

### Technical Data

Speaker Type: 2-Way Active Speaker

### Acoustical data

Frequency Response [-10dB]: 55 - 20.000 Hz  
Frequency Response [+/- 3dB]: 60 - 19.000 Hz  
Max SPL: 126 dB  
HF: 1 "  
Type HF: Compression driver  
Directivity: 90/70 x 60 °  
Horn: Asymmetrical CD Horn  
LF: 12 "

### Amplifier

Amp Technology: Digipack™  
Amp Class: Class D  
Power PRG: 600 Watt

### Processor

Controller: DSP 24bit/48kHz  
System Presets: Flat, Processed  
Limiter: Dual Active Peak, RMS, Thermal

### Mechanics

Housing: Polyporpylen PP  
Angles Up: Monitor use 43 °  
Width: 402 mm (16.08 in)  
Height: 615 mm (24.6 in)  
Depth: 356 mm (14.24 in)  
Weight: 18,5 kg (39.68 lbs)

## CROMO 15+

### Technical Data

Speaker Type: 2-Way Active Speaker

### Acoustical data

Frequency Response [-10dB]: 45 - 20.000 Hz  
Frequency Response [+/- 3dB]: 50 - 19.000 Hz  
Max SPL: 128 dB  
HF: 1 "  
Type HF: Compression driver  
Directivity: 90/70 x 60 °  
Horn: Asymmetrical CD Horn  
LF: 15 "

### Amplifier

Amp Technology: Digipack™  
Amp Class: Class D  
Power PRG: 600 Watt

### Processor

Controller: DSP 24bit/48kHz  
System Presets: Flat, Processed  
Limiter: Dual Active Peak, RMS, Thermal

### Mechanics

Housing: Polyporpylen PP  
Angles Up: Monitor use 43 °  
Width: 470 mm (18.8 in)  
Height: 720 mm (28.8 in)  
Depth: 405 mm (16.2 in)  
Weight: 22.9 kg (50.49 lbs)



CR 12+



CR 15+