


IS115S

Passive Bass-reflex Subwoofer

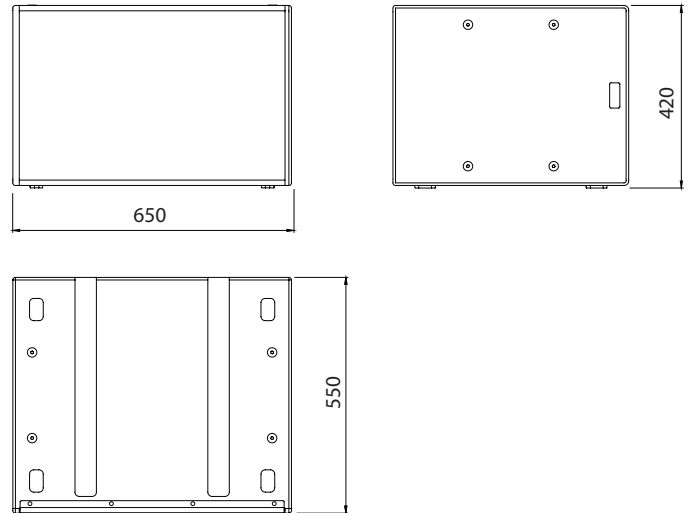

MAIN FEATURES

- High professional acoustic performance
- Premium components
- Touring inspiration
- Maximum configurability in stacking or hanging
- IP55 certification
- Maximum resistance to weather conditions
- Available in black or white

DESCRIPTION

From the dBTechnologies experience in the world of sound reinforcement, the IS115S subwoofer is born: a perfect extension for the low frequencies of the top-performing speakers in the IS series. Designed for indoor and outdoor applications such as arenas, performing arts center, houses of worship, multifunctional venues, and clubs, the IS115S is a rugged and durable complement, thanks to the IP55 certification.

Extremely versatile with various connection options, this sub can be suspended using dedicated accessories. Combining touring experience with extended flexibility and premium component quality, IS115S is the perfect solution for sound reinforcement in medium and large-sized environments where high-quality acoustic performance is an essential purpose. Available in white or black finish.

Speaker Type	Passive Bass-reflex Subwoofer
RMS Power	800 W
Peak Power	1600 W
Usable Bandwidth [-10 dB]	38 Hz - Xover
Frequency Response [-6 dB]	42 Hz - Xover
Impedance	8 Ohm
Sensitivity 1W@m	96 dB
Max SPL	133 dB
LF	1x 15", 4" v.c.
Connections	Screw terminal block (+ -)
Housing	Plywood, water-painted coating
Rigging points	Screw connection
IP rating	IP 55
Width	650 mm (25.59 in)
Height	420 mm (16.54 in)
Depth	550 mm (21.65 in)
Weight	27.8 Kg (61 lbs)
Height	780 mm (30.71 in)
Depth	430 mm (16.93 in)
Weight	28.7 Kg (63 lbs)

ACCESSORIES



DRK-1

Flybar for VIO X206, IS26T, IS210L, VIO S115 or IS115S. White version available




DRK-2

Multiple flybar for VIO X206, IS210L, IS26T or/and VIO S115, IS115S. White version available



LP-4

Link plate for VIO S115 and IS115S.



LP-6

Link bracket for IS210L speaker and IS115S subwoofer stack or flown mounting